




CaF2 BBAR 1.5-5.0 microns

Part Number: BBAR-CaF2-1.5-5.0

Wavelength (μm)	Transmission avg
1.5-5.0	>95%

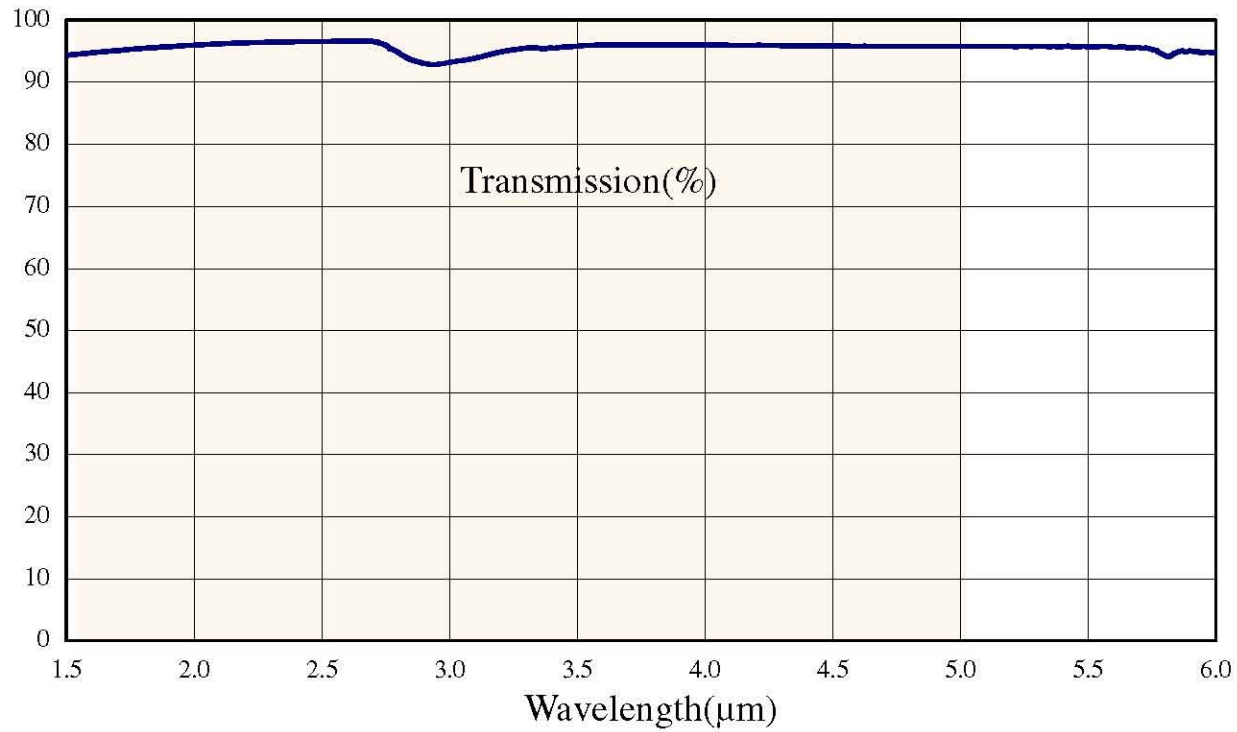




CaF2 B/S 50/50 2-8 microns

Part Number: BSP-50-CAF2

Wavelength (μm)	Reflection	Transmission
0.633 (HeNe)	-	3-10%
2.0-8.0	50 \pm 10%	50 \pm 10%
1.5-10.0	50 \pm 15%	50 \pm 15%

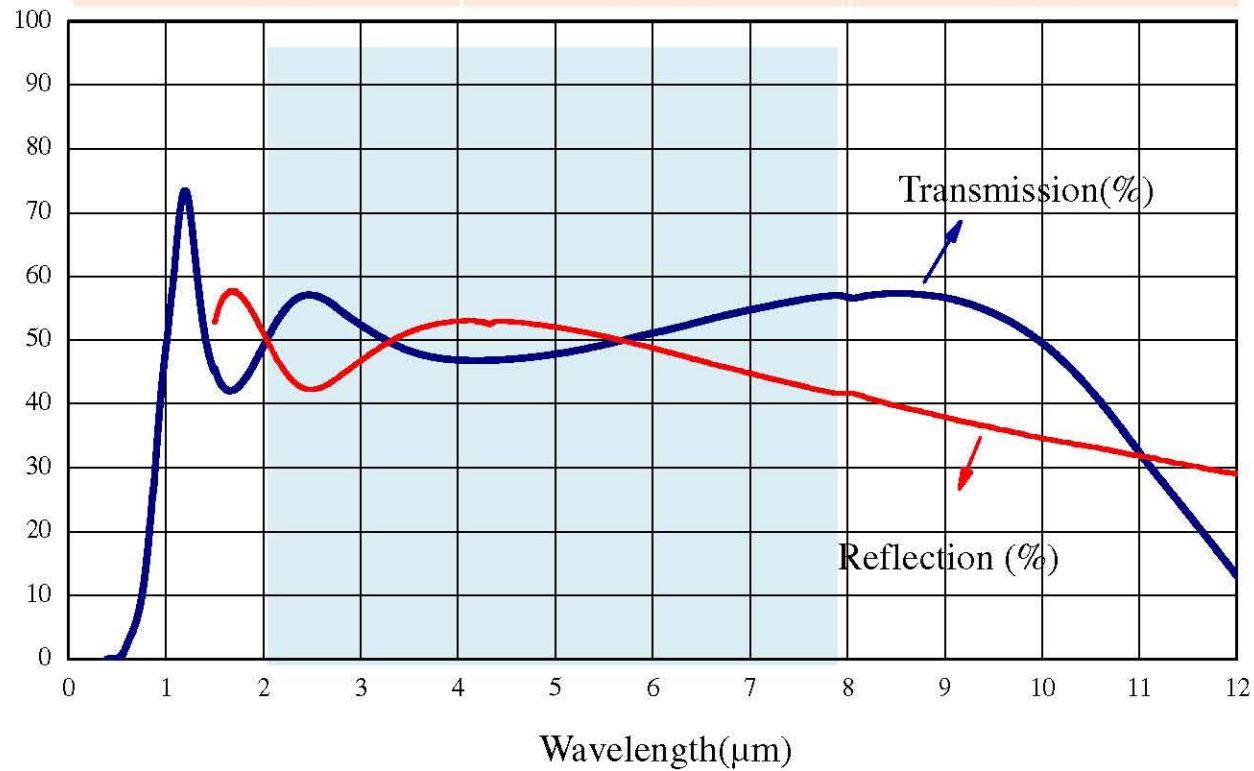




CaF2 B/S 50/50 1.5-5.0 microns

Part Number: BSP-50-CAF2 1.5-5.0

Wavelength (μm)	Reflection	Transmission
0.633 (HeNe)	-	2-10%
1.5-5.0	50+/-10%	50+/-10%

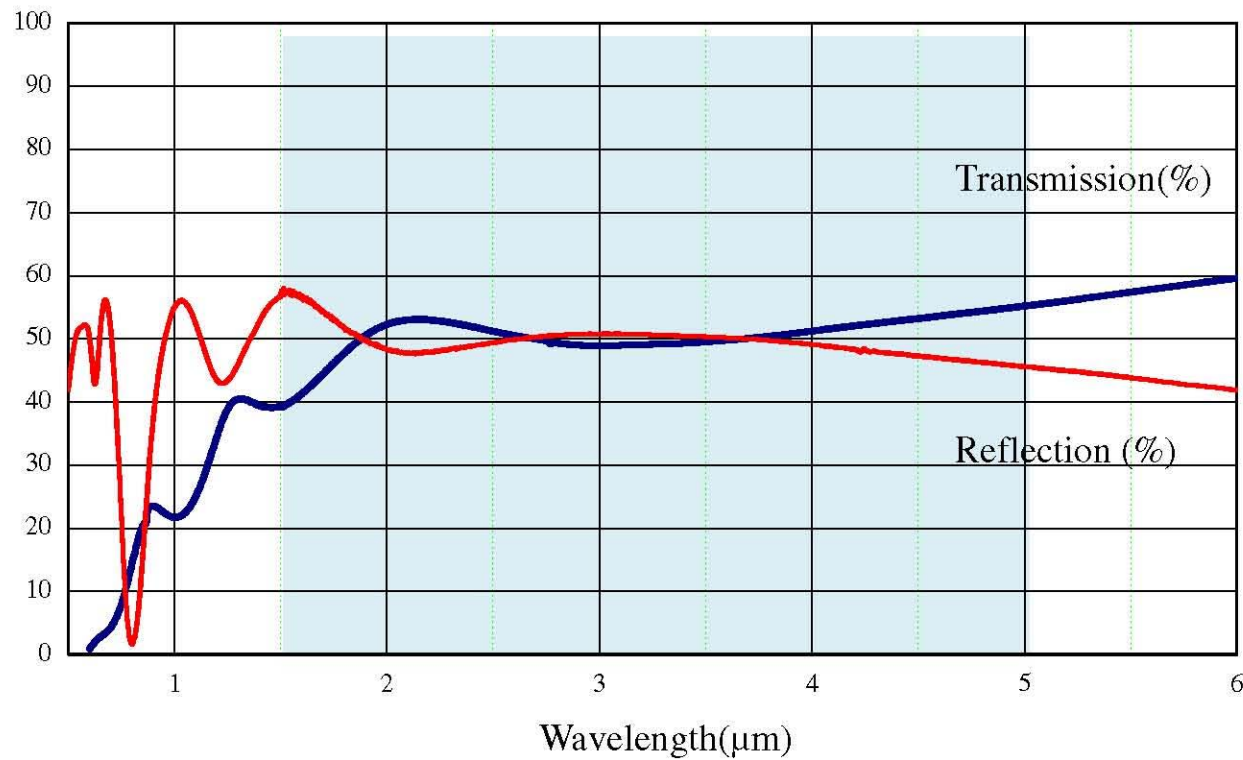




CaF2 BBAR 3-5 microns

Part Number: BBAR-CaF2-3-5

Wavelength (μm)	Reflection avg	Reflection max	Transmission avg	Transmission min
3.0-5.0	<0.5%	<1%	>97%	>90%
3.4-5.0	<0.5%	<1%	>98%	>95%

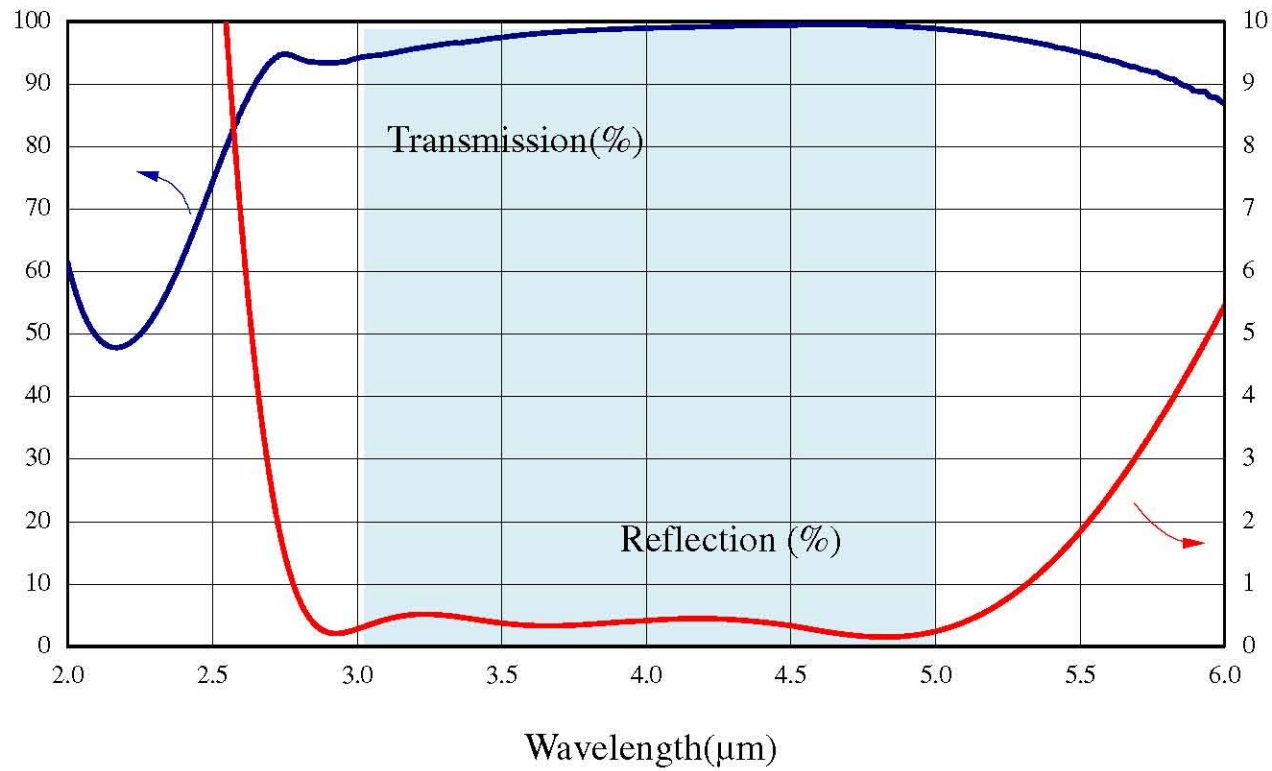




CaF2 BBAR 0.8-2.5 μ m

Part Number: BBAR-CAF2-0.8-2.5

Wavelength (μ m)	Reflection avg	Transmission avg
0.8-2.5	<1.5%	>96.5%

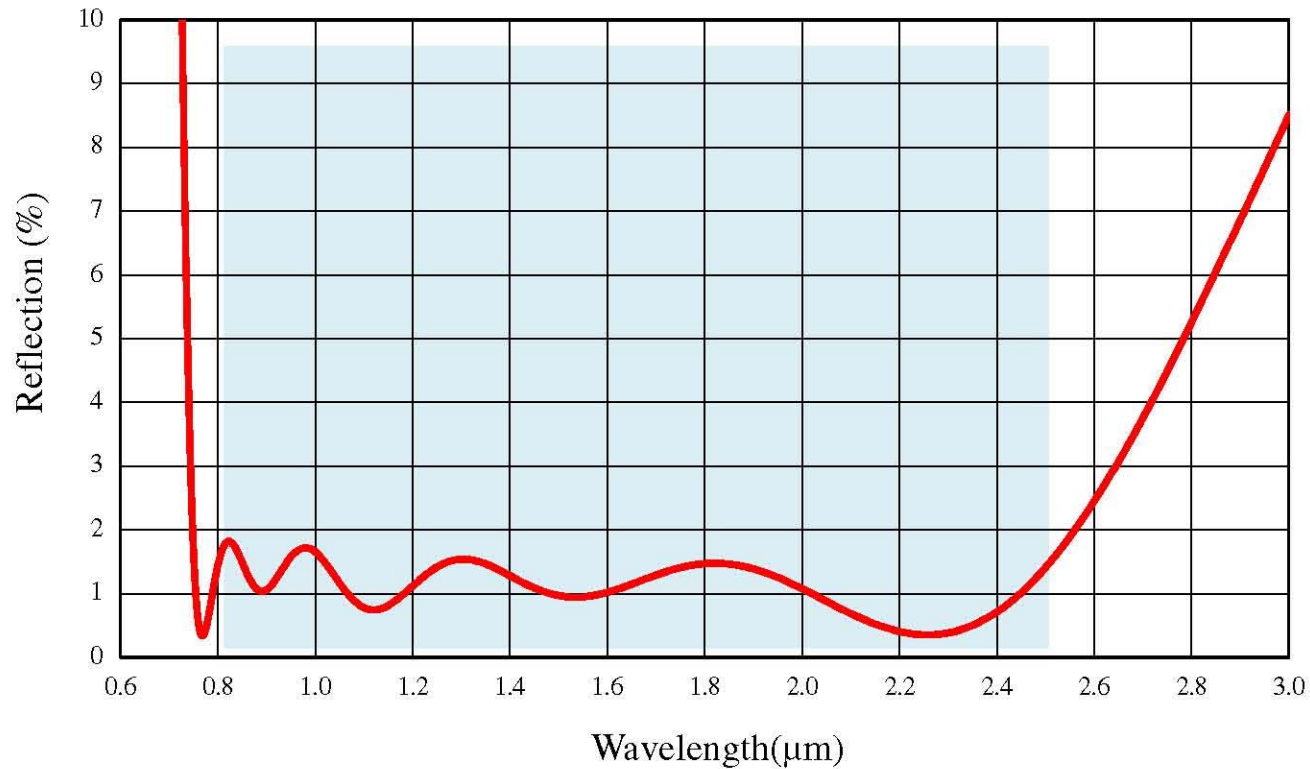

CaF2 Tri Band AR for 1.06, 1.57, and 3.4-5.0 microns

Part Number: TRB-CAF2-1.06-1.57-3.4-5.0

